

# ARTEMIS AL3920



## Benefits

- Attractive indirect lantern suited to metal halide or high pressure sodium lamps

## Features

- Base of high pressure die cast aluminium body, complete with die cast aluminium arms supporting the upper canopy. Canopy comprises aluminium reflector in white and an upper aluminium section in grey
- Glass protector sealed onto the aluminium base, with lamp and gear compartments protected to IP66
- High purity one-piece aluminium reflector, allowing spacings of up to four times lantern height. Toughened flat glass 5mm thick
- Integral control gear, insulation Class 1 (standard)
- Supplied as standard in Gunmetal 9007 finish

## Colours

- RAL9007 Gunmetal

	Lamp wattage and type	Lamp holder	Description	Weight (Kg)*	Windage (m <sup>2</sup> )*
<b>AL3921</b>	150W HCI-TS	RX7s	Indirect reflector	12	0.14
	150W SON-TD	RX7s	Indirect reflector	12	0.14

\*Max in range.




## Column options


	6m	5m	4m		6m	5m	4m
Fixed				Base diameter (mm)	140	140	140
Tubular	TB060/SP2	TB050/SP2	TB040		Shaft diameter (60mm spigot)	76	76
Tubular painted	TB060/SP2/2P9007	TB050/SP2/2P9007	TB040/2P9007	Base height (mm)		1250	1250
Hi-cone in RAL9007 Gunmetal	TB060/HC/2P9007	TB050/HC/2P9007	TB040/HC/2P9007	Flange plate (mm)	Type 0	Type 0	Type 0
Accessories				Door opening (mm)	500 x 100	500 x 100	500 x 100
<b>ELSAB1/6A</b> Single phase, cut-out, 6A, termination plate				Cable entry (root) (mm)	150 x 50	150 x 50	150 x 50
Columns and brackets finished hot dip galvanised then spray painted with 2-pack acrylic coat. Wet finish 190 microns.							




## Key features

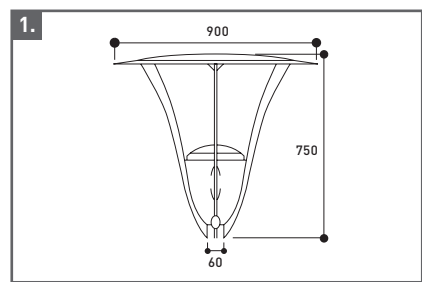

**Dimensions & Mounting**  
Mounting height: 4m – 6m

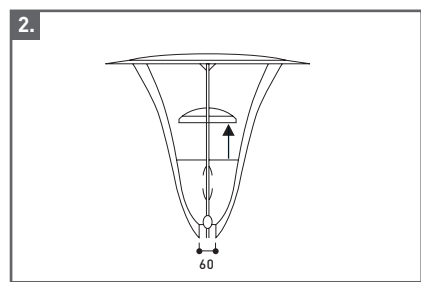

**Maintenance**  
Access the lamp and control gear by removing the glass cover

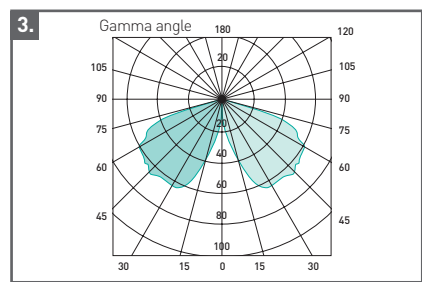

**AL3921**  
150W SON-TD  
Mounting height: 5m

All dimensions are in mm.

Full photometry available on our website [www.abaculighting.com](http://www.abaculighting.com)