

Name of manufacturer
Abacus®
Abacus lighting limited
 Sutton-in-Ashfield
 NG17 5FT England
 Tel:(+44) 01623 511 111 Fax: (+44)01623 552 133
 Web: www.abacuslighting.com

Data sheet reference:	TB050
Revision:	B
Page:	1 of 2
Date:	21st October 2008
Name of contract	Standard columns


Part A
General

Column reference	TB050
Manufacturers drawing reference	TB050
Column nominal height (m)	5
Terrain category defined in EN40-3-1	III
Column material	Q235, S275 & S355
Material design strength (N/mm ²)	235, 275 & 355
Number of door openings	1
Door opening size height (mm)	500
Door opening size width (mm)	100
Cross section of base height (mm)	500
Cross section of base width (mm)	95
Cross section of base depth (mm)	90

Corrosion protection

Base system type	As required
------------------	-------------


Part B
Foundation data

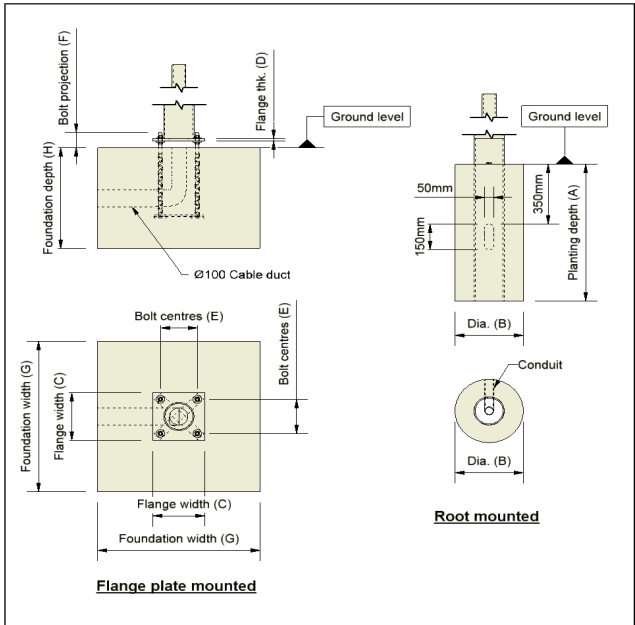

Flange plate and bolt details

Flange width (mm) Dim. (C)	280
Flange thk. (mm) Dim. (D)	12
Bolt centres (mm) Dim. (E)	200
Hole Dia or slot size (mm)	30x20
Unfactored design bolt load (N)	15,240
Holding down bolts	M16x500 long grade 4.6
Bolt projection (mm) Dim. (F)	125

Acceptable positions of bracket arm(s) relative to door

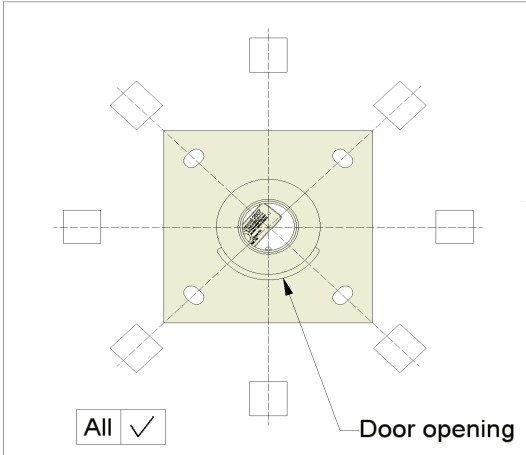

Additional sacrificial thk. (mm)	As required
----------------------------------	-------------

Line of action of maximum moment relative to the door opening

Overtuning moment (kNm)	4.315
Horizontal shear (kN)	1.119
Column weight root / flange (kg)	40 / 41
Root mounted	
Planting depth (m) Dim. (A)	0.8
Min'm concrete dia. (m) for standard soil types Dim. (B)	
G=630	0.192
G=390	0.31
G=230	0.525

Note 1. Foundation sizes shown above are determined in accordance with PD6547. In some instances the minimum concrete diameter is less than the planted tube of the column. In these circumstances it is permissible to install the column using compacted excavated material or material of better quality. Soil definitions are given in PD6547. If in doubt use the size for G=230

Flange mounted standard Abacus foundation details

Passive foundation ground bearing pressure 150KN/m ²	
Foundation width (mm) Dim. (G)	0.75
Foundation depth (mm) Dim. (H)	0.8
Non passive foundation ground bearing pressure 150KN/m ²	
Foundation width (mm) Dim. (G)	1.05
Foundation depth (mm) Dim. (H)	0.675
Non passive foundation ground bearing pressure 100KN/m ²	
Foundation width (mm) Dim. (G)	1.05
Foundation depth (mm) Dim. (H)	0.675
Non passive foundation ground bearing pressure 75KN/m ²	
Foundation width (mm) Dim. (G)	1.05
Foundation depth (mm) Dim. (H)	0.675

Note 2. For EN40 columns standard Abacus foundations can be selected from our Web site www.abacuslighting.com For Highways Agency specification specialist advise is required

Details of attachments	N/A.		
Area (m ²)	0	Coefficient	0
Total area (m ²)	0		
Height (m)	0		
Offset (m)	0		

Data sheet reference:	TB050
Revision:	B
Page:	2 of 2
Date:	21st October 2008
Name of contract	Standard columns

Part C
Acceptable lanterns

Post top mounted

Lantern lever arm (mm)	
Due to weight of lantern	Due to wind on lantern
400	400

Lantern connection		Lantern	Rationalized wind loading factors (Rwf)			
Diameter (mm)	Length (mm)	Max wt. (kg)	396	429	466	576
Maximum windage area (m ²) for rationalized wind loading factors						
FL1		35	0.672	0.609	0.548	0.417

Single arm bracket projection

Lantern lever arm (mm)	
Due to weight of lantern	Due to wind on lantern
400	400

Bracket projection (m)	Bracket reference	Material grade	Design strength (N/mm ²)	Fixing angle (deg.)	Diameter (mm)	Length (mm)	Lantern Max wt. (kg)	Rationalized wind loading factors (Rwf)				
								396	429	466	576	
Maximum windage area (m ²) for rationalized wind loading factors												
0.1	PR2-01/S/42	S275	275		As required		10	0.741	0.673	0.607	0.466	
0.25	PR2-025/S/42	S275	275		As required		10	0.702	0.636	0.574	0.438	
0.5	PR2-05/S/42	S275	275		As required		10	0.636	0.575	0.518	0.393	
0.75	PR2-075/S/42	S275	275		As required		10	0.58	0.524	0.47	0.354	
1	PR2-10/S/42	S275	275		As required		10	0.531	0.478	0.428	0.319	
1.25	PR2-125/S/42	S275	275		As required		10	0.486	0.436	0.39	0.288	
1.5	PR2-15/S/42	S275	275		As required		10	0.443	0.399	0.355	0.259	
0.1	PR2-01/S/48	S275	275		As required		10	0.741	0.672	0.607	0.465	
0.25	PR2-025/S/48	S275	275		As required		10	0.7	0.634	0.572	0.437	
0.5	PR2-05/S/48	S275	275		As required		10	0.632	0.571	0.514	0.389	
0.75	PR2-075/S/48	S275	275		As required		10	0.574	0.518	0.465	0.349	
1	PR2-10/S/48	S275	275		As required		10	0.523	0.47	0.421	0.312	
1.25	PR2-125/S/48	S275	275		As required		10	0.477	0.427	0.381	0.279	
1.5	PR2-15/S/48	S275	275		As required		10	0.434	0.388	0.344	0.249	
0.1	PR2-01/S/60	S275	275		As required		10	0.74	0.671	0.606	0.464	
0.25	PR2-025/S/60	S275	275		As required		10	0.697	0.631	0.569	0.434	
0.5	PR2-05/S/60	S275	275		As required		10	0.625	0.564	0.507	0.383	
0.75	PR2-075/S/60	S275	275		As required		10	0.564	0.508	0.455	0.339	
1	PR2-10/S/60	S275	275		As required		10	0.51	0.457	0.408	0.3	
1.25	PR2-125/S/60	S275	275		As required		10	0.46	0.411	0.365	0.264	
1.5	PR2-15/S/60	S275	275		As required		10	0.415	0.369	0.326	0.231	

Double arm bracket projection

Lantern lever arm (mm)	
Due to weight of lantern	Due to wind on lantern
400	400

Bracket projection (m)	Bracket reference	Material grade	Design strength (N/mm ²)	Fixing angle (deg.)	Diameter (mm)	Length (mm)	Lantern Max wt. (kg)	Rationalized wind loading factors (Rwf)				
								396	429	466	576	
Maximum windage area (m ²) for rationalized wind loading factors												
0.1	PR2-01/D/42	S275	275		As required		10	0.413	0.374	0.337	0.257	
0.25	PR2-025/D/42	S275	275		As required		10	0.404	0.365	0.329	0.249	
0.5	PR2-05/D/42	S275	275		As required		10	0.384	0.346	0.31	0.231	
0.75	PR2-075/D/42	S275	275		As required		10	0.366	0.329	0.293	0.216	
1	PR2-10/D/42	S275	275		As required		10	0.349	0.312	0.276	0.2	
1.25	PR2-125/D/42	S275	275		As required		10	0.332	0.295	0.26	0.184	
1.5	PR2-15/D/42	S275	275		As required		10	0.315	0.278	0.244	0.169	
0.1	PR2-01/D/48	S275	275		As required		10	0.412	0.373	0.337	0.257	
0.25	PR2-025/D/48	S275	275		As required		10	0.402	0.363	0.327	0.247	
0.5	PR2-05/D/48	S275	275		As required		10	0.379	0.341	0.305	0.227	
0.75	PR2-075/D/48	S275	275		As required		10	0.359	0.322	0.287	0.209	
1	PR2-10/D/48	S275	275		As required		10	0.34	0.303	0.268	0.192	
1.25	PR2-125/D/48	S275	275		As required		10	0.321	0.284	0.25	0.174	
1.5	PR2-15/D/48	S275	275		As required		10	0.302	0.266	0.231	0.157	
0.1	PR2-01/D/60	S275	275		As required		10	0.411	0.372	0.336	0.256	
0.25	PR2-025/D/60	S275	275		As required		10	0.398	0.36	0.323	0.244	
0.5	PR2-05/D/60	S275	275		As required		10	0.371	0.334	0.298	0.22	
0.75	PR2-075/D/60	S275	275		As required		10	0.347	0.31	0.275	0.198	
1	PR2-10/D/60	S275	275		As required		10	0.324	0.287	0.252	0.176	
1.25	PR2-125/D/60	S275	275		As required		10	0.301	0.264	0.23	0.155	
1.5	PR2-15/D/60	S275	275		As required		10	0.278	0.242	0.208	0.134	

Part D
Certification

It is certified that the information given in this data sheet has been obtained in accordance with the requirements of BS EN 40 as implemented by Departmental Standard BD 94 and the specification. (Delete if not applicable.)

Signed on behalf of the Contractor: *Philip Nichols*

Date: 21st October 2008