

Name of Manufacturer:

Abacus®

ABACUS LIGHTING LIMITED

Sutton - in - Ashfield, Nottinghamshire.

NG17 5FT ENGLAND

Tel: (+44) 01623 511111 Fax: (+44) 01623 552133

DATA SHEET No.

TB0604

Page

1 of 2

Revision No

Date

6th JUNE 2005

NAME OF CONTRACT:

PART A

General

Column Reference

Column nominal height (m)

Column material

Material design strength N/mm sq.

No. of door openings

Door opening size


Height	<input type="text" value="500"/> (mm)
Width	<input type="text" value="100"/> (mm)

Cross-section of base compartment

Height (mm)	Width (mm)	Depth (mm)
<input type="text" value="500"/>	<input type="text" value="95"/>	<input type="text" value="90"/>

Corrosion protection

Acceptable positions of bracket arms relative to door position

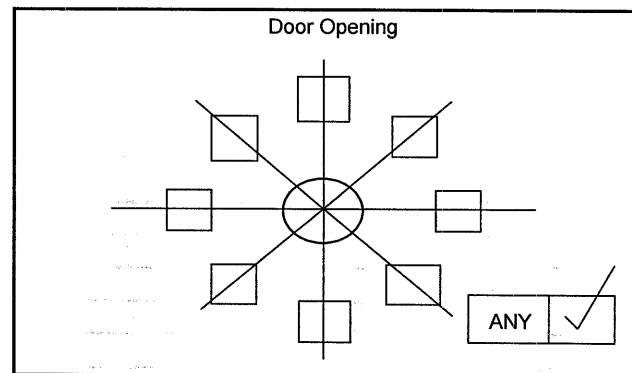

Manufacturers drawing ref. no:

Basic system type

Additional sacrificial steel thickness (mm)

Terrain Category as defined in EN40-3-1

Planting depth (m)

PART B

Foundation data

Relavent forces and moments at ground level.

Line of action of max moment relative to door opening

For flangeplates with slotted holes a diagram shall be included with this data sheet.

Standard Soil Type Factor G		
630	390	230
***** (m)	0.181 (m)	0.307 (m)

Bolt hole centres	Hole diameter	Design load/bolt
200 (mm)	30 x 20 (mm)	17113 (N)

Moment	4841 (Nm)	Shear	1144 (N)

(LOADINGS FOR COLUMN ARE UNFACTORED)

Details of Attachments	N/A
Area x Cf	(sq m) x
Height	(m)
Offset	(m)

Data Sheet No.	TB0604
Revision	Page 2 of 2
Date	6th JUNE 2005

PART C
Acceptable Lanterns

Post Top Columns

Lantern Lever Arm (mm)	
Due to Wt. of Lantern	Due to Wind on Lantern
*****	*****

Lantern Connection		Lantern	Rationalized Wind Loading Factors			
Diameter (mm)	Length (mm)	Max. Wt. (Kg)	396	429	466	576
			Maximum windage area (sq.m) For Rationalized Wind Loading Factors			
AS REQUIRED		*****	*****	*****	*****	*****

Single Arm Bracket Column

Lantern Lever Arm (mm)	
Due to Wt. of Lantern	Due to Wind on Lantern
400	400

Bracket Projection (m)	Bracket Reference	Material		Lantern Connection			Lantern Maximum Weight (Kg)	Maximum windage area (sq.m) For Rationalized Wind Loading Factors			
		Grade	Design Strength N/sq.mm	Fixing Angle	Diameter (mm)	Length (mm)					
0.3	INTEGRAL	S275	275	AS REQUIRED			10	0.568	0.509	0.453	0.332
0.75	INTEGRAL	S275	275	AS REQUIRED			10	0.474	0.421	0.371	0.263
1.25	INTEGRAL	S275	275	AS REQUIRED			10	0.369	0.327	0.288	0.196


Double Arm Bracket Column

Lantern Lever Arm (mm)	
Due to Wt. of Lantern	Due to Wind on Lantern
400	400

Bracket Projection (m)	Bracket Reference	Material		Lantern Connection			Lantern Maximum Weight (Kg)	Maximum windage area (sq.m) For Rationalized Wind Loading Factors			
		Grade	Design Strength N/sq.mm	Fixing Angle	Diameter (mm)	Length (mm)					
0.3	INTEGRAL	S275	275	AS REQUIRED			10	0.302	0.268	0.237	0.168
0.75	INTEGRAL	S275	275	AS REQUIRED			10	0.257	0.224	0.193	0.126
1.25	INTEGRAL	S275	275	AS REQUIRED			10	0.206	0.174	0.143	0.078

PART D
CERTIFICATION

It is certified that the information given in this data sheet has been obtained in accordance with the requirements of BS EN 40 as implemented by Departmental Standard BD 26 and the specification.

Signed on behalf of the Contractor 

Date.....6th JUNE 2005.

ABACUS LIGHTING LTD

Sutton - in - Ashfield Nottinghamshire NG17 5FT Tel: (+44) 01623 511111 Fax: (+44) 01623 552133