

# ECLISSE AL3600



## Benefits

- Design orientated aesthetic, ideal for a range of projects
- Sleek silhouette with minimal skyline impact
- Robust construction granting product longevity

## Features

- Die-cast aluminium body finished polyester powder coated (Grey Sable)
- High performance anodised reflector with road lighting distribution
- Toughened glass with silicon rubber gasketing providing ingress protection to IP66
- Supplied with bracket for post top mounting on Ø60mm

## Colours

- RAL9007 Gunmetal



	Lamp wattage and type	Lamp holder	Description	Weight (Kg)*	Windage (m²)
<b>AL3601</b>	70/100/150W HQI-E 70W SON-T 100/150W SON-T	E27 E40	Flat glass, integral gear	13.7	0.074


\*Max in range.




## Column options

Choose between fixed and base hinged


	6m	5m	4m		6m	5m	4m
<b>Fixed</b>				Base diameter (mm)	140/168	140/168	140/168
Tubular	TB060/SP1	TB050/SP1	TB040				
Finished Gunmetal	TB060/SP1/2P9007	TB050/SP1/2P9007	TB040/2P9007	Shaft diameter (60mm spigot)	76	76	60/76
Lo-cone Gunmetal	TB060/HC/2P9007	TB050/HC/2P9007	TB040/HC/2P9007				
<b>Base</b>				Base height (mm)	1250	1250	1250
Light duty	T061RLS/SP1	T051RLS/SP1	T041RLS/SP1				
Finished Gunmetal	T061RLS/SP1/2P9007	T051RLS/SP1/2P9007	T041RLS/SP1/2P9007	Flange plate (mm)	Type 0	Type 0	Type 0
Root length (mm)	1000	800	600				
<b>Accessories</b>				Door opening (mm)	500 x 100	500 x 100	500 x 100
<b>ELSAB1/6A</b> Single phase, cut-out, 6A, termination plate							
Columns and brackets finished hot dip galvanised to BSEN1461:1999				Cable entry (root) (mm)	150 x 50	150 x 50	150 x 50
Where indicated, columns are spray painted with a long life 2-pack acrylic coat, wet finish 190 microns. RAL9007 Gunmetal.							

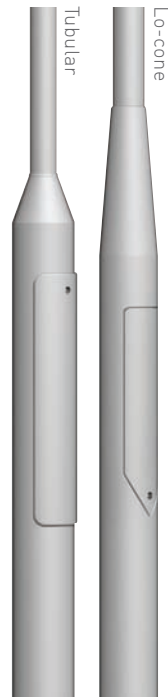


## Key features

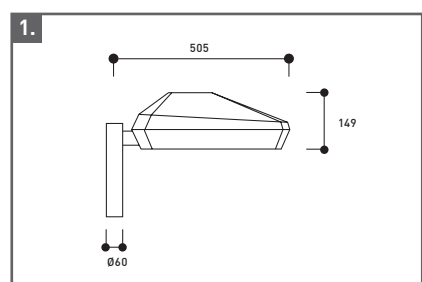

**Dimensions & Mounting**  
Mounting height: 4m-6m

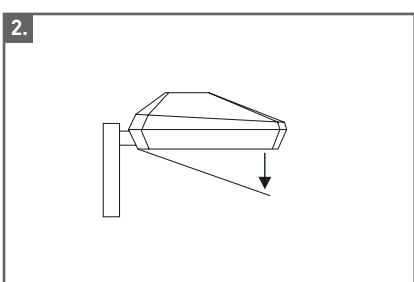

**Maintenance**  
Access the lamp and control gear by lowering glass via 4 releasing screw fixings

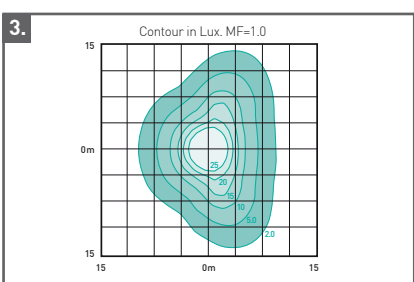

**AL3601**  
70W SON-T  
Mounting height: 5m

All dimensions are in mm.

Full photometry available on our website [www.abaculighting.com](http://www.abaculighting.com)