


CONICAL

4-6M CONICAL ALUMINIUM


Designed to EN40. Finished as standard, or with optional anodised treatment

Flange Plate

Type C FA00C 4xM18



Column Dimensions

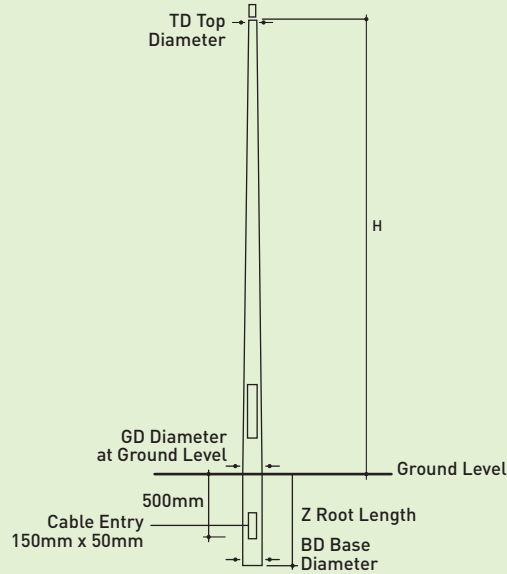

Accessories

- ELSAB1/6A Single fuse cut-out, 6A, loop in/out (not fitted)
- ELSAB12/6A Twin fuse cut-out, 6A, loop in/out (not fitted)

Brackets

Luminaires are typically post top mounted. If a bracket is required, contact the Abacus sales office.

Root Mounted

| Dimensions (mm) | | | | | | | | |
|-----------------|--------|-----|-----|-----|-----|--------------|-------------|-------------------------|
| Product Code | Height | TD | GD | BD | z | Door Opening | Weight (kg) | Min. Concrete Diameter* |
| CA040 | 4m | 60 | 120 | 130 | 800 | 400x95 | 13.4 | 0.30 |
| CA050 | 5m | 60 | 120 | 130 | 800 | 400x95 | 17.4 | 0.35 |
| CA060 | 6m | 60+ | 146 | 160 | 800 | 400x95 | 29.6 | 0.30 |

*Root mounted columns come fitted as standard with a polyurethane protection sleeve on the root, to 250mm above ground level (colour light grey)
 †Integral 60mm spigot, 180mm length

Flange Plate Mounted

| Dimensions (mm) | | | | | | | | |
|-----------------|--------|----|-----|--------------|--------------|-------------|---------------------|--|
| Product Code | Height | TD | GD | Door Opening | Flange Plate | Weight (kg) | Concrete Dimension* | |
| CA040/FP | 4m | 60 | 120 | 400x95 | Type C | 14.4 | 650 x 750 | |
| CA050/FP | 5m | 60 | 120 | 400x95 | Type C | 18.4 | 650 x 750 | |
| CA060/FP | 6m | 60 | 120 | 400x95 | Type C | 22.5 | 650 x 750 | |

*Concrete dimension based on a minimum ground bearing pressure of 150KN/m², (S = square dimension, H = depth)
 For complete headland data please refer to data sheets on www.abacuslighting.com/columns.asp