

ORIS AL3700



Benefits

- Contemporary aesthetics combined with flat glass optics
- Suited to a wide range of applications

Features

- High pressure die cast aluminium body and door opening sealed to IP66
- Tool free access by means of front opening clasp
- Low wind resistance resulting from sleek profile
- Smaller model suited to take up to 150w SON/MH and 140w Cosmo White. Larger model suited to take up to 250w SON/MH and 140w Cosmo White
- Integral control gear
- Supplied as standard in RAL9006

Colours

- RAL9006 Silver
- RAL9007 Gunmetal
- RAL9005 Black
- RAL9003 White



	Lamp wattage and type	Lamp holder	Description	Weight (Kg)*	Windage (m ²)*
AL3701	70W SON-T 70/100W/150W MH	E27	Flat glass integral control gear	7.5	0.05
AL3702	100W/150W SON-T	E40	Flat glass integral control gear	7.5	0.05
AL3703	140W/90W/60W Cosmo White supplied with electronic control gear	PGZ12	Flat glass integral control gear	7.5	0.05
AL3705	150W/MH	E27	Flat glass integral control gear	9	0.06
AL3706	150W/250W SON-T	E40	Flat glass integral control gear	9	0.06
AL3707	140W Cosmo White supplied with electronic control gear	PGZ12	Flat glass integral control gear	9	0.06


*Max in range.



Column and bracket options

Choose between fixed and base hinged

	8m	6m	5m		8m	6m	5m
Fixed				Base diameter (mm)	168	140	140
Tubular	TB081/SP	TB060/SP	TB050/SP				
Hi-cone				Shaft diameter (mm)	89	76	76
Hi-cone (Silver)	TB081/HC/2P9006	TB060/HC/2P9006	TB050/HC/2P9006				
Base				Base height (mm)	1250	1250	1250
Light duty	T081RLS/SP	T061RLS/SP	T051RLS/SP				
Light duty (Black)	T041RLS/SP/2P9005	T051RLS/SP/2P9005	T061RLS/SP/2P9005	Flange plate (mm)	Type 1	Type 0	Type 0
Brackets	Silver	Gunmetal	Galv. Finish				
Single (300mm)	CHC/S/300/9006	CHC/S/300/9007	CHC/S/300	Root length (mm)	1200	1000	800
	Twin	CON/D/xx/76 or 89	CHC/D/300/9007				
For flange plate add/FP: e.g. TB040/FP/HC1				Door opening (mm)	600 x 115	500 x 100	500 x 100
				Cable entry (root) (mm)	150 x 50	150 x 50	150 x 50

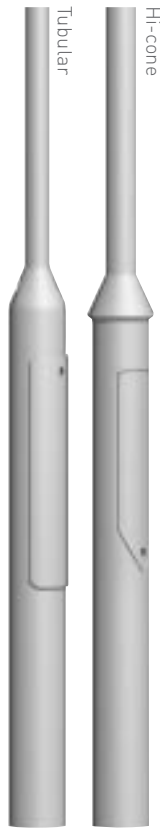

Accessories	
ELSAB1/6A	Single phase, cut-out, 6A, termination plate
ELSAB12/6A	Twin fuse cut-out, 6A, termination plate

Columns and brackets finished hot dip galvanised then spray painted with 2-pack acrylic coat (if required). Wet finish 190 microns.



Key features

<p>1.</p>	<p>2.</p>	<p>3.</p>	<p>4.</p>
<p>AL3701/02/03 Mounting height: 4m-6m</p>	<p>AL3705/06/07 Mounting height: 6m-10m</p>	<p>Maintenance Tool free access to lamp and integral control gear by opening clasp and lowering door</p>	<p>AL3701/2 150W SON Mounting height: 6m</p>

All dimensions are in mm.

Full photometry available on our website www.abaculighting.com