

CHALLENGER 1 LED


AL6100-AL6300

IP66




Abacus[®]

Leaders in Lighting

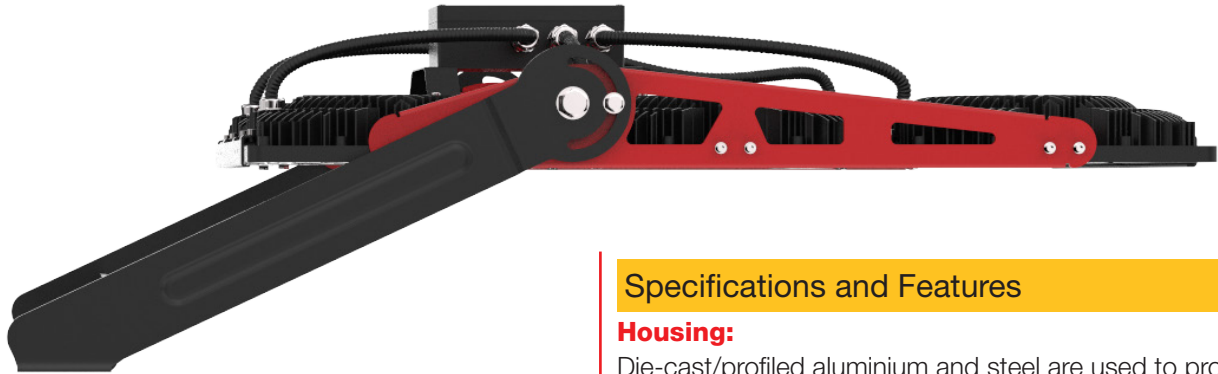

Dimensions

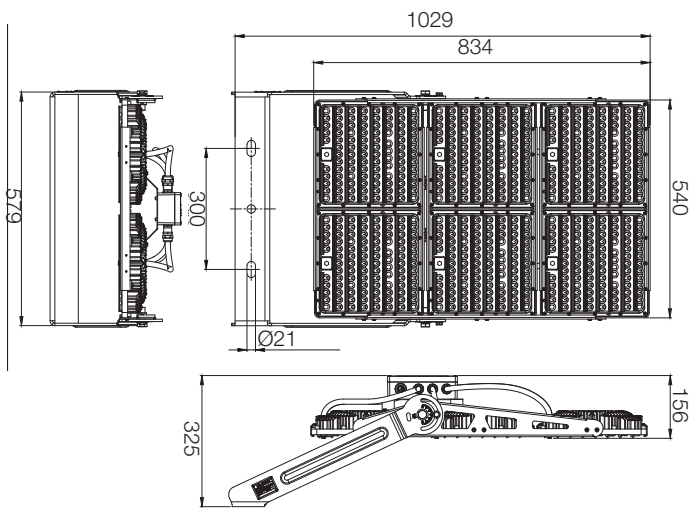

Wind Area:

6 module: 0.149m²
4 module: 0.130m²
2 module: 0.107m²

Specifications and Features

Housing:

Die-cast/profiled aluminium and steel are used to produce an elegant and unobtrusive low profile design. 29.6kg in weight (6 module) with an IP66 rating.

Ratings:

UKCA, CE, CB, SAA, IP66

Finish:

Powder coated Black/Red

Driver:

- 1500W driver is 3ch. DALI2/DMX driver, 5.6kg, IP66
- 400W - 1200W data available on request
- Integral or remote options available


Example applications:

- Sport
- Rail
- Ports
- Amenity
- Open Areas

Warranty & Lifetime:

5 years standard warranty
60,000 hours L80B10 25°C

Imagery

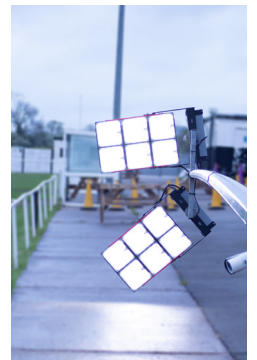

[in /company/AbacusLighting](https://www.abacuslighting.com)

[@AbacusLighting](https://twitter.com/AbacusLighting)

[f /AbacusLighting](https://www.facebook.com/AbacusLighting)

[www.AbacusLighting.com](https://www.abacuslighting.com)

DocID: datasheet-al6100-20211006A

CHALLENGER 1 LED

AL6100-AL6300

Abacus[®]
Leaders in Lighting

Technical Specifications

Light Efficiency	> 125lm/W
Luminous Flux	190,000lm
Colour Temperature	5200K (3000 ~ 5700K optional)
CRI	Ra70 (80/90 optional)
Beam Angle	Medium/Narrow
Total Power Consumption	1500W±40W
Output Current	4.8A (constant current)*6
Output Voltage	DC 40~48V
Net Weight	29.6Kg (6 module)
Light Dimensions	L1077mm × W653mm × H290mm
Light Package Dimensions	L1160mm × W710mm × H335mm
Power Factor	≥0.95
IP Rating	IP66
Input Voltage	AC 200-440V
Power Frequency	47-63Hz


Luminaires come in 2,4 or 6 module variants: (See Product Selection for details)



Product Selection


Body Size	Beam Type	Wattage (W)	RA/CCT	Ambient Temp	Gear
AL61 = 6 modules	01 = Narrow	15 = 1500W (6 module)	752 (Ra70/5200k)	S = Standard (25°C)	R = Remote
AL62 = 4 modules	02 = Medium	12 = 1200W (6 module)	852 (Ra80/5200k)	H = High (50°C)	I = Integral
AL63 = 2 modules		10 = 1000W (4 module)			
		05 = 500W (2 module)			
		04 = 400W (2 module)			

Example Product Selection:

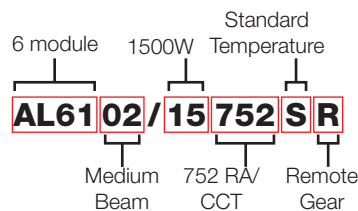

Photometric Output

AL6101 Distribution:



AL6102 Distribution:

