

ARDUO AL22700

IP65



Benefits

- Continuity without changing fitting with covers to suit lighting requirements


Technical Features

- Power: 17W (System power 19.5W)
- Colour temperature 5000K as standard
- Available in two sizes
- Available with half eyelid cover
- Heavy-duty die-cast aluminium housing and top frame with powdercoat finish
- Can be tapped for side conduit entry
- LumaLens clear or opal polycarbonate vandal-resistant lens

- LumaFit LEDs on aluminium boards
- Surface mount with included brackets (optional adjustable brackets available)
- Dimmable driver
- 5 year warranty
- Rated life: 50000 hours
- Voltage 120 - 277V, 50/60Hz
- Operating temperature -40°C ~ + 40°C

Colour

- Black
- White
- Bronze
- Grey



	Wattage (W)	Lumen Output (lm)	Length (mm)	Style	Colour Temp. (K)	Colour (As Standard) ***	Lens
AL22701 *	43	5538	308	Horizontal, full lens	5000	Black	Clear
	26.2	2940	308	Horizontal, full lens	5000	Black	Opal
AL22702	43	4879	308	Horizontal, eyelid	5000	Black	Clear
	26.5	2369	308	Horizontal, eyelid	5000	Black	Opal
AL22703	43	5294	308	Vertical, eyelid	5000	Black	Clear
	26.5	2369	308	Vertical, eyelid	5000	Black	Opal
AL22704 **	81.4	9183	613	Horizontal, full lens	5000	Black	Clear
	52	6632	613	Horizontal, full lens	5000	Black	Opal


STIRRUP AND COLOUR OPTIONS:

* Stirrup option available, add code: LV1BR


** Stirrup option available, add code: LV2BR

*** Please specify if other colour when quoting / ordering: Z = Bronze / W = White / G = Grey

Key features

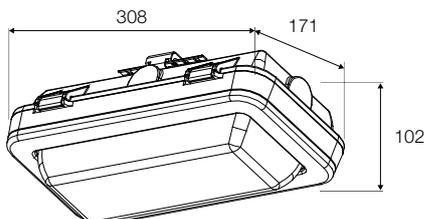

Dimensions (AL22701 - AL22703)

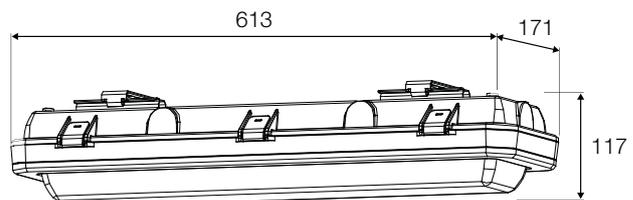

Dimensions (AL22704)

All dimensions are in mm.